

No. 7 Dual **Check Valves**

Scope of Use / Specification Sheet

The No. 7 Dual Check Valve range delivers proven performance in a proven design.

Dual Check Valves are designed to prevent cross connection of non-potable water into safe drinking water systems.



DCX05

Product List		
Size	Model	Order Code
15mm	HOT M x F	DCX17
20mm	FxF	DCX05
	FxM	DCX09
25mm	FxF	DCX12
	FxM	DCX13
32mm	FxF	DCX14
40mm	FxF	DCX16

Description

The No. 7 range comes in sizes from 15mm to 40mm and are designed with optimised head-loss characteristics, to ensure minimised head-loss.

The No. 7 Dual Check Valve Range provides a cost effective product solution for low hazard backflow protection on 15mm to 40mm water services.

Features and Benefits

- Protects against back pressure and back siphonage
- Suitable for low hazard applications
- Compact and lightweight
- Corrosion resistant
- Independently operating check valves
- Allowable operating pressure of 1600kPa
- Operating temperature range of 1°C to 60°C
- Suitable for vertical and horizontal installations
- Approved to AS/NZS 2845.1:2022 Solid build quality
- Long life performance, through its high quality components

Application

The Dual Check Valve provides protection to the potable water supply from contamination in low hazard applications like meter connections on domestic properties.






No. 7 Dual Check Valves

Performance Specifications							
	DCX17	DCX05	DCX09	DCX12	DCX13	DCX14	DCX16
Size	15mm	20mm	20mm	25mm	25mm	32mm	40mm
Pressure Class	PN16	PN16	PN16	PN16	PN16	PN16	PN16
Max. Operating Pressure	1920kPa	1920kPa	1920kPa	1920kPa	1920kPa	1920kPa	1920kPa
Max. Temperature	90℃	60°C	60°C	60°C	60°C	60°C	60℃
Installation Orientation	Horizontal /	Vertical					

Dimensions				
Size	Code	Inlet	Outlet	Length
HOT 15mm	DCX17	G 1/2" B Male BSP Compression	RP ½" Female BSP	90mm
20mm	DCX05	RP ¾" Female BSP	RP 3/4" Female BSP	100mm
20mm	DCX09	RP ¾" Female BSP	RP 3/4" Male BSP	105mm
25mm	DCX12	RP 1" Female BSP	RP 1" Female BSP	110mm
25mm	DCX13	RP 1" Female BSP	RP 1" Male BSP	110mm
32mm	DCX14	RP1¼" Female BSP	RP1¼" Female BSP	165mm
40mm	DCX16	RP11/2" Female BSP	RP 1 ½" Female BSP	165mm

Note: All measurements in mm unless otherwise stated.

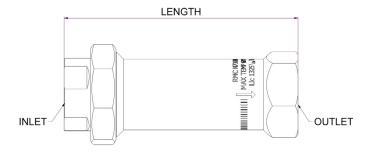

Installation

Installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS/NZS 3500. This product is compliant to the Lead Free requirements of the National Construction Code Volume Three. For further Scope of Use, please visit www.rmc.com.au/resources.

Standards and Approvals



Warranty

Reliance Worldwide Corporation (Aust.) Pty. Ltd. (RWC) will either replace or repair any defective goods where the defect arose as a result of manufacture within the warranty period. You may contact RWC at the phone number, address or e-mail shown below for further information or to make a claim.

Visit www.rmc.com.au/warranty to view the warranty statement in full and for further important information.



rmc.com.au | 1800 810 803 | sales.au@rwc.com

BRAND Reliance Valves®	PRODI	JCT	Various		
DATE		12	2/09/2024		
ART CODE SS2	4030	VER	ISION v2		
VERSION BRIEF DCX17 Max Temperature changed to 90 deg as per feedback from Vu La					
DIE DIMENSIONS mm			297 x 210		
DESIGNED			J Steffan		
PROOFED					
PRODUCT LEAD			C Lacey		
LINE MANAGER					
DIRECTOR					
PROOF ALL DP		BCOE BCOE BCOE SPEL AIRTA	DE# DE SIZE DE/QR PROX L CHECK		
PROOF PACKAGING/MANU					
DP COMPLIANCE ICON PARTNER DSC F&B (Min. 4) HQ ADDRESS	$\boxtimes \square$ (QR CO	NINGS (3°) DDES CONTENTS		
PROOF PACKAGING ONLY		_			
DP BATCH: YR/WK			REPORT HT-WARN		
PROOF MANUAL ONLY DP TOC CHECK 4x PAGES DIAGRAM REFS DOUBLE SPACES		ONT	THRU DSC RIGHT UPDATES DVE NOTES		
PROOF CARTON/BAG (L2/L	.3) ONL	Υ			
DP □ □ CARTON QTY □ □ WEIGHT WARN					
RV	V				