


Stainless Steel Cabinet Kit

Scope of Use / Specification Sheet

The RMC Stainless Steel Cabinet Kit is a lockable cabinet with 4-in-1 inlet fittings, which allows secure installation of tempering or thermostatic mixing valves.

TVX2012 includes 3-in-1 inlet fittings and is designed for use with a **MIX20X/20XU HeatGuard Tempering Valve only**.

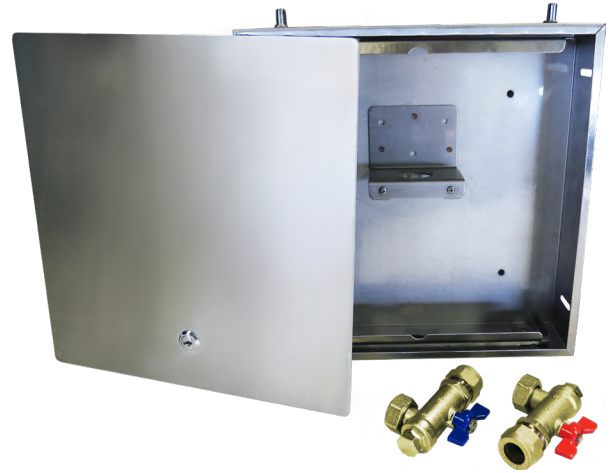

Product List

Order Code	Description	Compatible	Inlet Fittings
TVX1512	Cabinet Kit with 15mm Fittings	MIX15X/15XU	G 3/4" x G 1/2" B
TVX2011	Cabinet Kit with 20mm Fittings	MIX15X/15XU	G 3/4" x G 3/4" B
TVX2012*	Cabinet Kit with 25mm x 20mm Fittings	MIX20X/20XU	G 1" x G 3/4" B

Spare Parts

Order Code	Description	Compatible
84-013**	Door for MX2221 Cabinet Assembly	MX2221
MX2755-IP	Cabinet Only	
MX2757-IP	Cabinet Lid with Lock & Key	
MX3380-IP	Cabinet Lock & Key	

*Must be used with a MIX20X/20XU Tempering Alloy Valve only.

**Compatible with TVX1512, TVX2011, TVX2012

Materials

Cabinet	Stainless Steel
Fittings	Lead Free DZR Brass
Check Valves	Acetal
Strainer	Stainless Steel

Features and Benefits

- Lockable to prevent unwanted access
- Union fittings included for easy installation
- Integrated non-returns (TVX1512 and TVX2011 only), TVX2012 must use MIX20X/20XU only.
- Includes isolation valves to facilitate servicing
- Strainer included to protect against dirt and debris
- Polished stainless steel finish
- TVX2012 3-in-1 fittings do not include non-return valves, MIX20X/20XU valve must be installed.

Description

The RMC Stainless Steel Cabinet Kit includes 4-in-1 fittings, with either 15mm or 20mm copper compression connections, to facilitate installation and maintenance. The 4-in-1 fittings include isolation, strainer, non-return, and test port functions.


TVX2012 includes 3-in-1 fittings that have G1 x G3/4 B threads, suitable for installation with a MIX20X/20XU tempering valve only.

Stainless Steel Cabinet Kit

Dimensions

Size	A	B	C	D	E	F	G	H
TVX1512/ TVX2011 / TVX2012	319	300	204	180	85	127	75	220

Note: All measurements in mm unless otherwise stated.

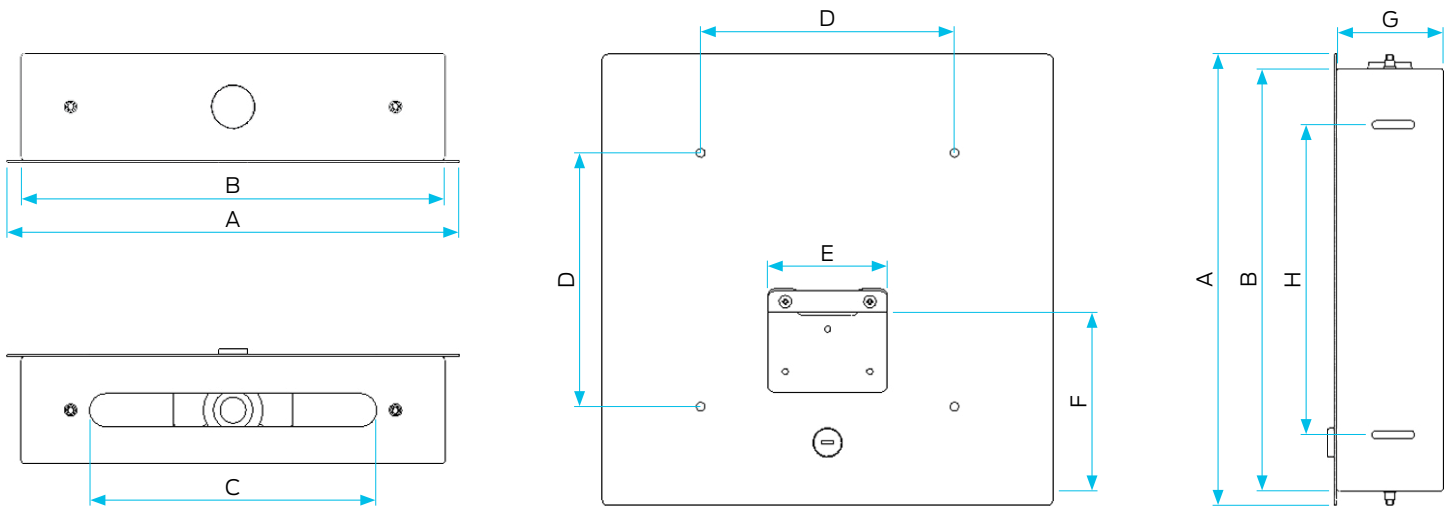

Technical Specifications

Maximum supply pressure (4-in-1 fittings)	1600kPa
Maximum supply temperature (4-in-1 fittings)	90°C
Maximum supply pressure (4-in-1 fittings)	1600kPa
Maximum supply temperature (4-in-1 fittings)	90°C

Warranty

Reliance Worldwide Corporation (Aust.) Pty. Ltd. (RWC) will either replace or repair any defective goods where the defect arose as a result of manufacture within the warranty period. You may contact RWC at the phone number, address or e-mail shown below for further information or to make a claim.

Visit www.rmc.com.au/warranty to view the warranty statement in full and for further important information.

Installation

Installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS/NZS 3500. This product is compliant to the Lead Free requirements of the National Construction Code Volume Three. For further Scope of Use, please visit www.rmc.com.au/resources.

Application

The Stainless Steel Cabinet Kit is ideal for installation in public facilities. The lockable cabinet ensures access to the valve is restricted for greater security and safety.